

Description

A versatile fiberglass acoustical wall panel wrapped in a wide selection of fabrics or vinyls. Available with hardened shaped edges. Engineered sound control with thicknesses from 1 to 4 inches and sizes up to 4 ft. x 10 ft. 5' x 10' option available with 66-inch wide fabric

Composition

6-7 PCF density fiberglass core
Chemically hardened edges
Fabric faced with factory in-stock fabric by Guilford of Maine, or factory-approved customer-selected material

Fire Test Data

Class A per ASTM E 84

Acoustical Performance

Sound Absorption per ASTM C-423.
Type A Mounting


Applications

- Interior surfaces where superior acoustical performance is required.
- Conference Rooms
- Schools/Classrooms
- Auditoriums
- Media Rooms
- Multi-Purpose Rooms
- Churches
- Office Spaces
- Reception Areas
- Home Theatres
- Pro Theatres

Mounting

Impaling Clips
Rotofast Clips
Z-Clips
Velcro

Frequency, (Hz)	125	250	500	1000	2000	4000	NRC
1" Thick	0.05	0.32	0.82	1.04	1.02	1.01	0.80
2" Thick	0.29	0.82	1.10	1.04	1.01	1.02	1.00
3" Thick	0.90	1.03	1.06	1.01	0.98	0.97	1.00
4" Thick	1.02	1.11	1.03	1.01	1.03	1.03	1.05

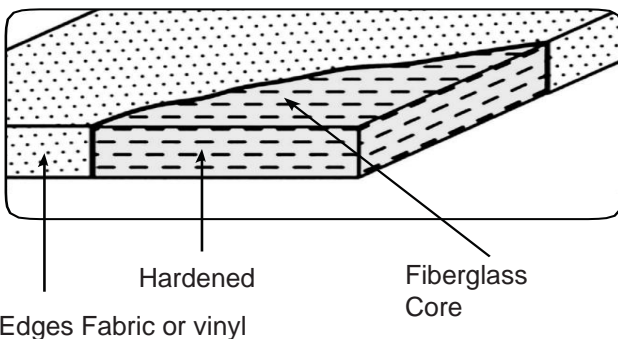

Edge Detail

